



Tuning the Elite

Calibrated Downhaul System

1) To set your downhaul:

a) Use the correct Ezzy mast combination and check that the length of your mast falls within the recommended length (chart 1). See “Troubleshooting” if your Ezzy mast combination does not match with the lengths in Chart 1.


b) Downhaul your sail until the calibration mark lines up with the bottom of the mast (figure 1).

Which Calibration Line to Use?

- For extremely strong wind, use the MAX line.
- For normally powered conditions, use the MED line.
- For light wind, use the MIN 1 line.
- For very light wind, use the MIN 2 line.

Additional Information:

- We have set the adjustable head cap to the correct setting. **Do not re-adjust the head webbing.**
- Do not over-downhaul. Too much downhaul will make the sail unstable.
- If you feel back-hand pressure, apply more outhaul.
- To get the best performance, adjust the downhaul and outhaul together. For example, if you increase the downhaul for strong wind, you should also increase the outhaul. And, for light wind, to get maximum power, reduce the outhaul as well as the downhaul.

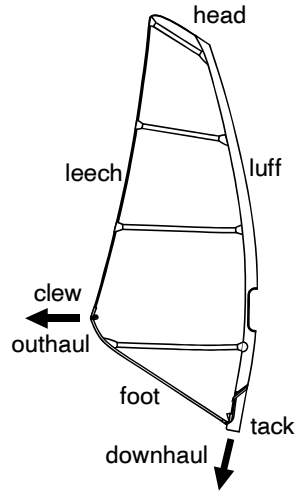

	Mast Combinations		Total Length (including tip plug)
	Bottom	Top	
2.7	315	340	315.5 cm
3.0	315	340	315.5
3.4	340	340	340.5
3.7	340	370	355.5
4.0	370	370	370.5
4.2	370	370	370.5
4.5	370	400	385.5
4.7	370	400	385.5
5.0	400	400	400.5
5.3	400	400	400.5
5.7	400	430	415.5
6.1	430	430	430.5

Chart 1: correct mast combinations and lengths.




Figure 1: Downhaul until the calibration mark lines up with the bottom of the mast.

2) Setting The Downhaul Without The First Choice Mast:

a) Set your mast extension to the medium extension height.

b) Slide your mast into the luff sleeve, making sure the mast sits above the battens (figure 2). **Do not apply any outhaul.**

c) Begin downhauling slowly while observing the front of the foot batten. Continue downhauling just until the front of the foot batten “pops” to side of the mast (figure 3) and then stop downhauling.

d) This is your medium wind setting.

e) Now, remove the downhaul gauge from the velcro and move it so that the medium mark lines up with the bottom of your mast (figure 4).

f) The downhaul gauge is set. From now on, just downhaul until the gauge lines up with the bottom of your mast.

Additional Information:

- Do not over-downhaul. The Elite is not designed to rig with a floppy leech.

-If you feel back-hand pressure, apply more outhaul.

- If you change to a different mast, you will need to repeat steps a) through e).

3) Tension the Tack Strap:

Tension the tack strap until you see a small wrinkle running out from the corner of the sail. Then, wrap the end of the tack strap around your mast extension and loop the end of the tack strap under itself and secure the strap with the velcro. Store your downhaul line in the mesh pocket located inside the pad (figure 5).

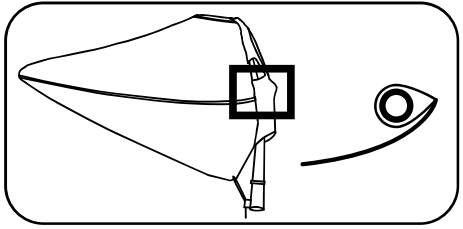


Figure 2: Slide the mast in above the foot batten.

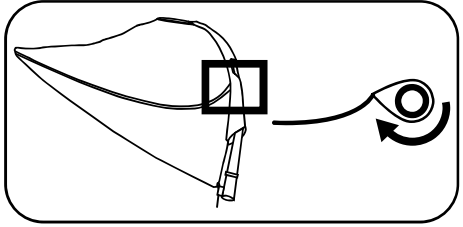


Figure 3: Downhaul slowly until the front of the foot batten “pops” to the other side of the mast.




Figure 4: Move the calibration gauge so the medium mark lines up with the bottom of the mast.

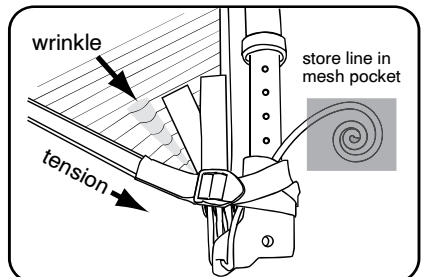


Figure 5: Tension tack strap and store downhaul line in mesh pocket.

4) Setting the Outhaul:

The Elite requires more positive outhaul than most sails (fig. 5).

The three cords sewn at the clew indicate how much positive outhaul is needed for varying wind conditions. The longest cord shows the maximum outhaul for strong wind; the shortest cord indicates the minimum outhaul for light wind and the middle cord shows a medium outhaul setting.

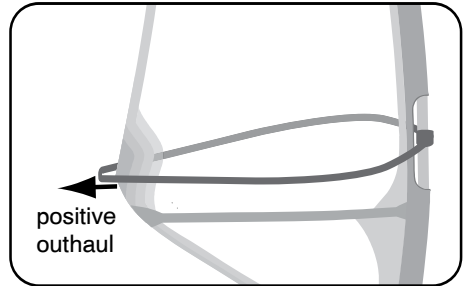


Fig. 5: Positive outhaul

Follow these steps to set the outhaul:

- a) First, correctly set the downhaul.
- b) Next, release all outhaul tension.
- c) Then, gently pull on the outhaul cord and set your boom to the end of the cord (fig. 6).
- d) Finally, outhaul your sail to the end of the boom (fig. 7).

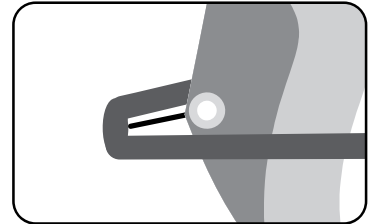


Fig. 6: Set the boom length to the outhaul cord

Additional Information:

- When setting your boom to the cord, don't pull the clew.
- We suggest starting with the medium length cord. If you feel over-powered (back-hand pressure), increase the outhaul about 1 to 2 cm. If you feel under-powered, reduce the outhaul by about 1 to 2 cm.

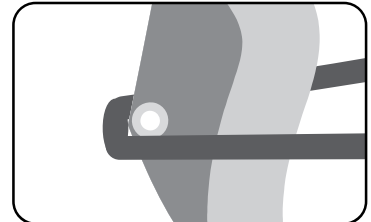


Fig. 7: Outhaul sail to the end of the boom

5) Tensioning the battens:

Use the tensioner key that is stored in the pad of the sail and tension the battens until you eliminate any vertical wrinkles that extend out from either side of the batten pocket (figure 8).

Note: Your battens have already been tuned by us in the factory and most likely will not need further tuning. Be careful not to over-tension your battens.

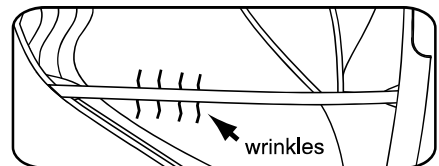


Figure 8: Tension the battens until there are no vertical wrinkles on either side of the batten pocket.

6) Sail Care:

- Creasing damages the sail cloth. Avoid creasing your sail when rigging and de-rigging.
- Sunlight kills all sail cloth. Keep your sail out of the sun when not sailing.
- Don't rig on sharp objects.
- After rolling the sail, tuck the pad so it rests along the sail, wrap the tack strap around the pad and the sail, then attach the velcro (fig. 9).
- Insert your sail sleeve-end first into the sail bag (fig. 10).
- Never store your sail upright resting on the clew.
- Don't roll your sail when it is wet with fresh water. This will cause the window vinyl to turn hazy blue. Allow your sail dry thoroughly for the vinyl to clear up.

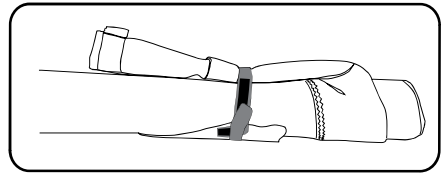


Fig. 9: After rolling, tuck the pad, then wrap with the tack strap and secure the velcro.

7) Troubleshooting:

> I am using the correct Ezzy mast combination, but my mast is 3.0mm longer than the lengths listed on your chart, what should I do?

a) Remove the downhaul gauge from the sail and re-attach it 3.0mm **lower**.

> My Ezzy mast is 3.0mm shorter than the lengths listed on your chart, what should I do?

a) Move the downhaul gauge **up** by 3.0mm.

> My sail has too much back-hand pressure.

- a) Apply more outhaul.
- b) Reduce downhaul.




Fig. 10: Sleeve end first into bag.

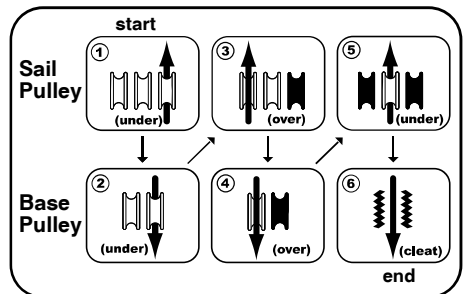


Fig. 11: Threading the tack pulley for a Chinook-style extension.